


### 规格SPECIFICATIONS

间距(PITCH): 1.25mm  
 极数(Poles): 2~30  
 适用电线范围(Useable wire range): AWG32#~28#  
 适用印制板厚度(Applicable PC board thickness): 0.6~1.2mm  
 额定电流(Current rating): 1A, AC, DC  
 额定电压(Voltage rating): 250V, AC, DC  
 工作温度(Working Temperature): -25℃ ~ +85℃  
 相对湿度(Relative humidity): 93%+40℃  
 耐压值(Withstand voltage): 500V /min  
 接触电阻(Contact resistance): ≤0.01Ω  
 绝缘电阻(Insulation resistance): ≥500mΩ


### 材料MATERIAL

孔座(HOUSING): 尼龙66 (NYLON66 UL94V-0)  
 针座(PINHEADER):  
 1、基座(WATER): 尼龙46 (NYLON46 UL94V-0)  
 2、插针(PIN): 磷青铜 (PHOSPHOR BRONZE)  
 端子(TERMINAL): 磷青铜 (PHOSPHOR BRONZE)


#### DF14-T




#### DF14-Y

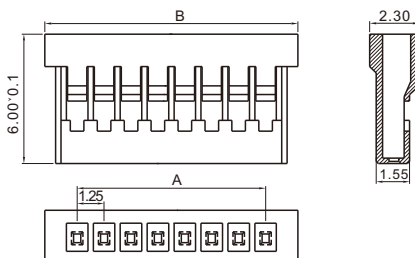

#### DF14-AWB

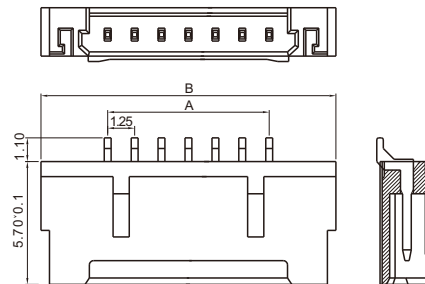

#### DF14-AWBD

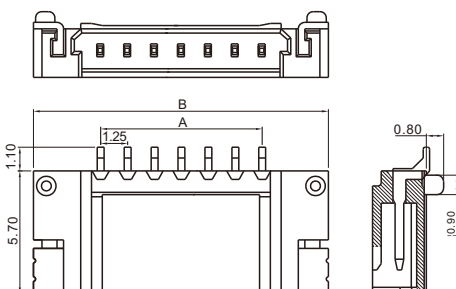

| 线数<br>poles | 型号(Type) |            |             | A     | B     |
|-------------|----------|------------|-------------|-------|-------|
| 2           | DF14-2Y  | DF14-2AWB  | DF14-2AWBD  | 1.25  | 7.45  |
| 3           | DF14-3Y  | DF14-3AWB  | DF14-3AWBD  | 2.50  | 8.70  |
| 4           | DF14-4Y  | DF14-4AWB  | DF14-4AWBD  | 3.75  | 9.95  |
| 5           | DF14-5Y  | DF14-5AWB  | DF14-5AWBD  | 5.00  | 11.20 |
| 6           | DF14-6Y  | DF14-6AWB  | DF14-6AWBD  | 6.25  | 12.45 |
|             |          |            |             |       |       |
|             |          |            |             |       |       |
|             |          |            |             |       |       |
|             |          |            |             |       |       |
| 27          | DF14-27Y | DF14-27AWB | DF14-27AWBD | 32.50 | 38.70 |
| 28          | DF14-28Y | DF14-28AWB | DF14-28AWBD | 33.75 | 39.95 |
| 29          | DF14-29Y | DF14-29AWB | DF14-29AWBD | 35.00 | 41.20 |
| 30          | DF14-30Y | DF14-30AWB | DF14-30AWBD | 36.25 | 42.45 |